


Rendimiento de Modelo DB1-1/2 1-1/2" Descarga x 2" Succión (3500 RPM)



DB1-1/2 2" Succión x 1-1/2" Descarga			Capacidades GPM														Carga a Válvula Cerrada (Ft.)			
Modelo	HP	Dia. Imp.	Carga Total en Pies																	
			25	30	35	40	45	50	60	70	80	90	100	110	120	130	140	150	160	
1DB1-1/2	1	3-15/16"	125	105	95	86	75	63												60
15DB1-1/2	1-1/2	4-5/16"		123	118	112	106	96	78	50										75
2DB1-1/2	2	4-5/8"			130	126	120	115	100	82	52									87
3DB1-1/2	3	5-1/8"						144	132	118	103	88	62							110
5DB1-1/2	5	5-3/4"									163	153	141	126	107	78				140
75DB1-1/2	7-1/2	6-7/16"														170	165	135	130	170

Nota: Todos los datos de desempeño se basan en el voltaje nominal de la placa.

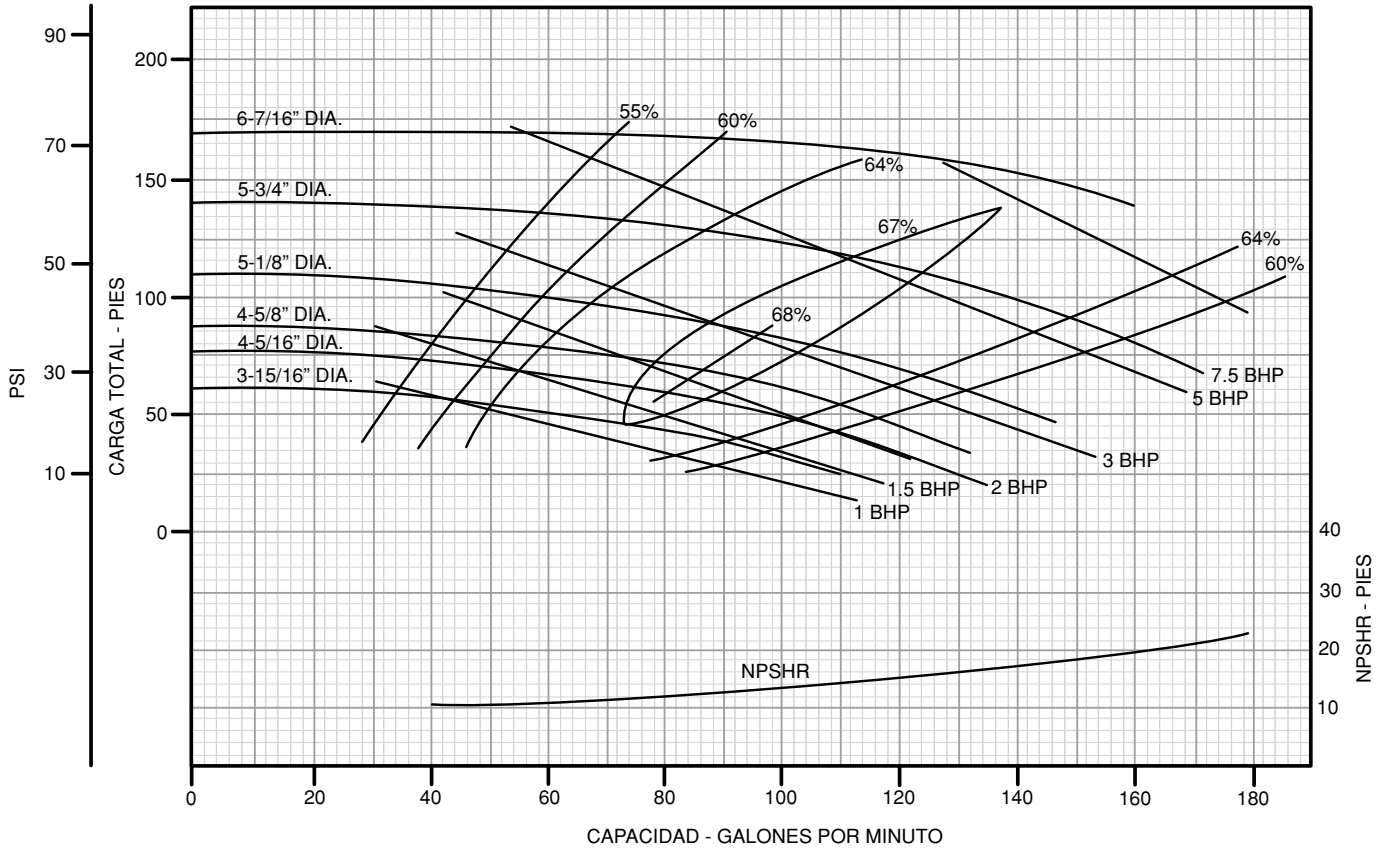