


Rendimiento de Modelo DB2 2" Descarga x 3" Succión (3500 RPM)



DB2 3" Succión x 2" Descarga			Capacidades GPM															Carga a Válvula Cerrada (Ft.)		
Modelo	HP	Dia. Imp.	Carga Total en Pies																	
			20	25	30	35	40	45	50	60	70	80	90	100	110	120	150	200	250	
15DB2	1-1/2	3-13/16"	175	160	145	125	100	65												50
2DB2	2	4"		185	170	160	145	125	100											58
3DB2	3	4-1/2"						175	165	140	90									75
5DB2	5	5-1/8"								235	210	190	160							100
75DB2	7-1/2	5-13/16"										260	240	225	200	160				135
10DB2	10	6-7/16"											310	290	275	260	185			170
15DB2	15	7-1/4"													350	305	205			230
20DB2	20	7-15/16"														365	275	130		260

Nota: Todos los datos de desempeño se basan en el voltaje nominal de la placa.

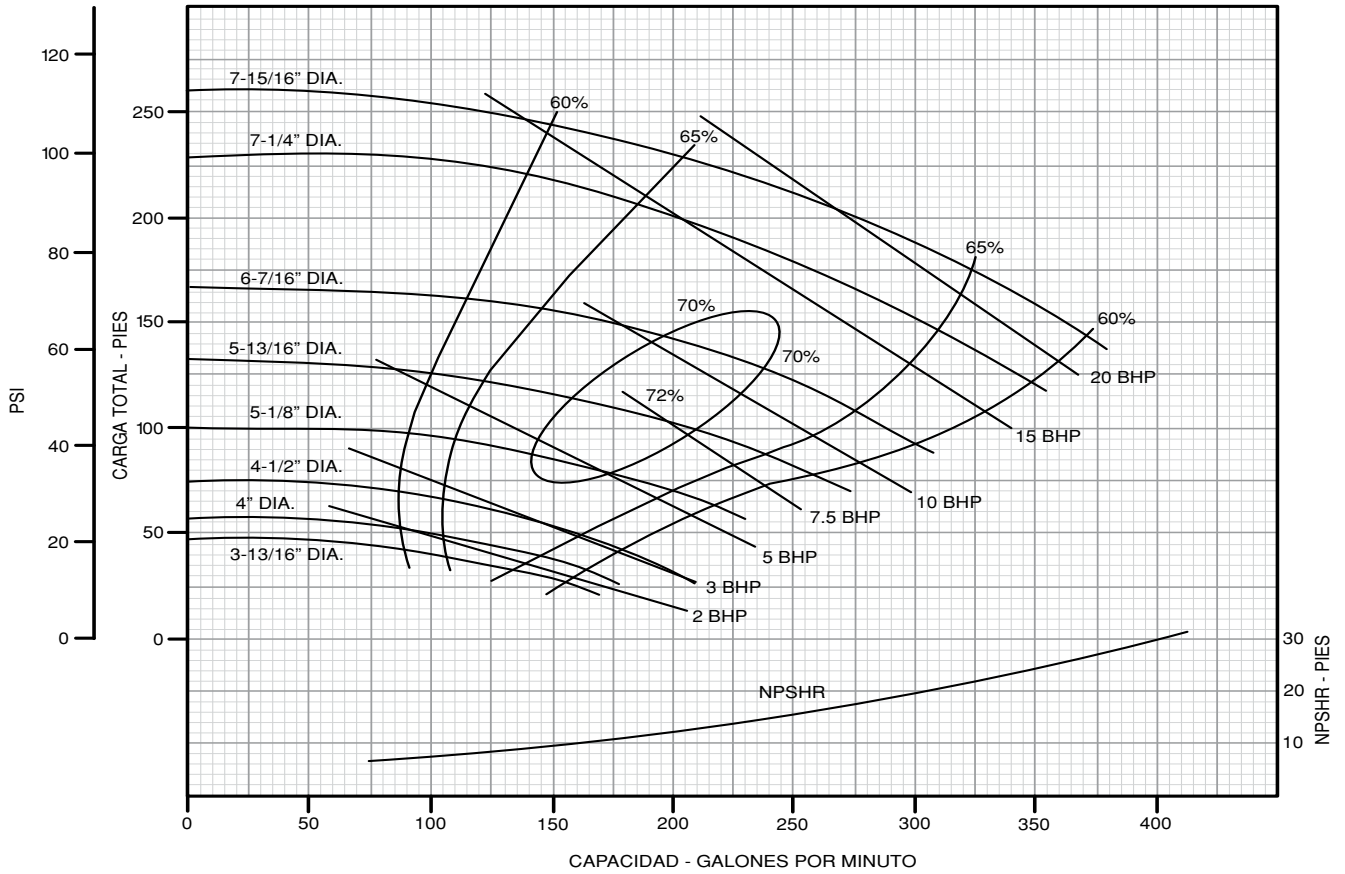