

Introducing the...

WR10

Air-Operated Double Diaphragm Pump

APPLICATIONS:

Car Wash Chemicals

Wash Solutions

Dispensing of:

Pigments

Inks

Paints

Additives

Sanitizers


Drum Transfer

**WARREN
RUPP®**

A Unit of **IPEX** Corporation
800 North Main Street
Mansfield, OH 44902 USA
419-524-8388 • Fax: 419-522-7867

www.warrenrupp.com


WR10 3/8" AODD Pump

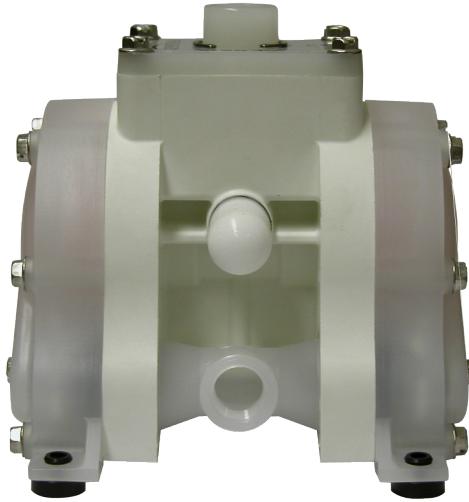

BENEFITS:

- Flows to 5 GPM (19 LPM)
- Multiple mounting positions
- Similar envelope dimensions to a standard 1/4" pump, but almost double the flow rate
- Cost competitive
- Size ideal for OEM applications
- Dependable operation


Various Mounting Options

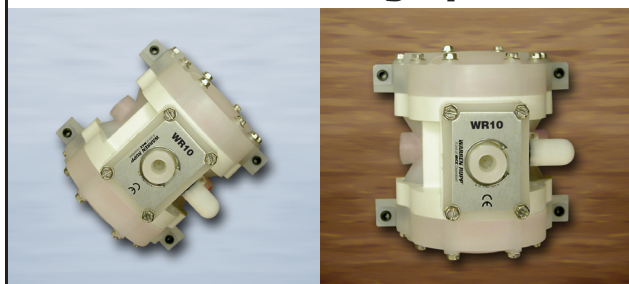

ceiling mount

wall mount

**WARREN
RUPP®**

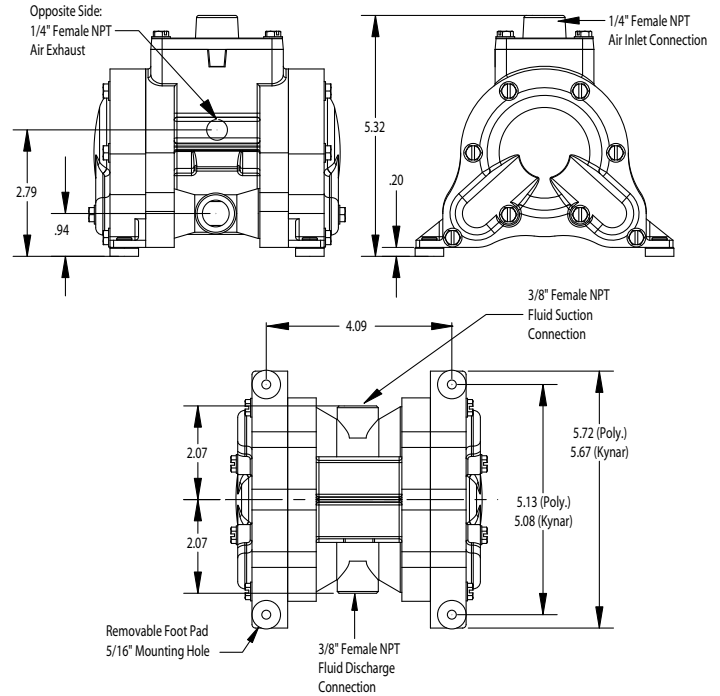

WR10 SPECIFICATIONS		
Shipping wt.	3 lbs.	1.36 kg
Max. pressure	100 psi	6.9 bar
Min. pressure	15 psi	1 bar
Max. particle size	1/16"	1.5 mm
Suction lift (dry)	16.5 ft.	5m
Suction lift (wet)	20 ft.	6m
Air inlet	1/4" NPT (f)/BSP	
Materials: Polypropylene body with Santoprene elastomers; Polypropylene body with PTFE elastomers; Kynar body with Santoprene elastomers; Kynar body with PTFE elastomers		

