

**WARREN
RUPP®**

Quality System
ISO9001 Certified

Environmental
Management System
ISO14001 Certified

IDEX
IDEX CORPORATION



U.S. Patent #5,851,109; 5,996,627;
400,210; 6,241,487
Other U.S. Patents Applied for

MARATHON II®


M07 Non-Metallic Design Level I Ball Valve

**Air-Powered
Double-Diaphragm Pump**



ENGINEERING, PERFORMANCE
& CONSTRUCTION DATA

| INTAKE/DISCHARGE PIPE SIZE | CAPACITY | AIR VALVE | SOLIDS-HANDLING | HEADS UP TO | DISPLACEMENT/STROKE |
|-----------------------------|---|-----------------------------|---------------------|---|--------------------------|
| Intake ¾" NPTF(BSP) | 0 to 23 gallons per minute (0 to 87 liters per minute) | No-lube, no-stall design | Up to .15 in. (4mm) | 100 psi or 231 ft. of water (7 bar or 70 meters) | .026 Gallon / .098 liter |
| Discharge 1½" NPTM (BSP) | | | | | |

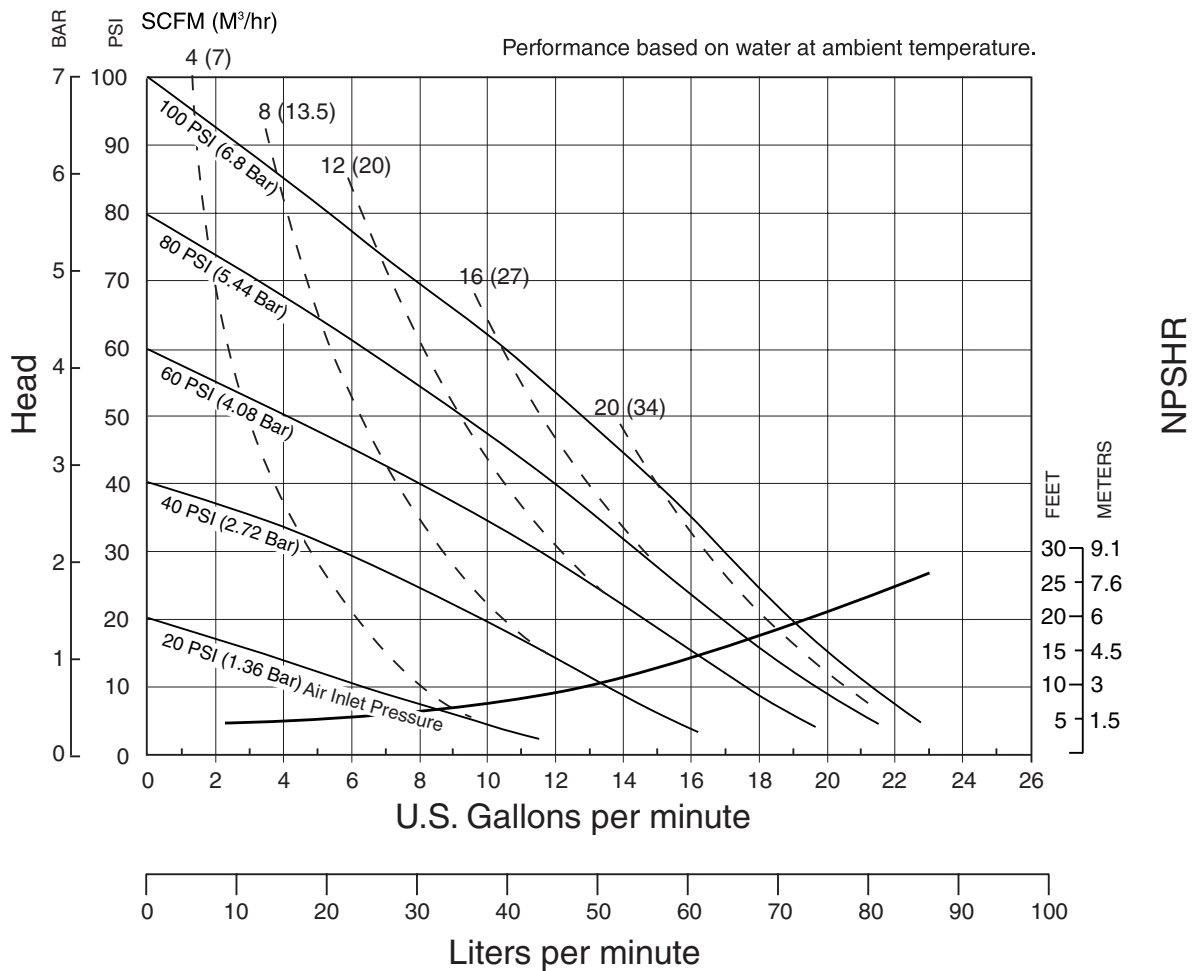

MARATHON II® pumps are designed to be powered only by compressed air.

Explanation of Pump Nomenclature

M07 Non-Metallic · Design Level 1· Ball Valve

| MODEL | Pump Brand | Pump Size | Check Valve Type | Design Level | Wetted Material | Diaphragm/Check Valve Materials | Check Valve Seat | Non-Wetted Material Options | Porting Options | Pump Style | Pump Options | Shipping Kit Options | Weight lbs. (kg) |
|-----------------|------------|-----------|------------------|--------------|-----------------|---------------------------------|------------------|-----------------------------|-----------------|------------|--------------|----------------------|------------------|
| M07B1P1PPNS000. | M | 07 | B | 1 | P | 1 | P | P | N | S | 0 | 00. | 17 (8) |
| M07B1P2PPNS000. | M | 07 | B | 1 | P | 2 | P | P | N | S | 0 | 00. | 17 (8) |
| M07B1K1KPNS000. | M | 07 | B | 1 | K | 1 | K | P | N | S | 0 | 00. | 21 (9.5) |
| M07B1K2KPNS000. | M | 07 | B | 1 | K | 2 | K | P | N | S | 0 | 00. | 21 (9.5) |
| M07B1N1NPNS000. | M | 07 | B | 1 | N | 1 | N | P | N | S | 0 | 00. | 18 (9) |
| M07B1N2NPNS000. | M | 07 | B | 1 | N | 2 | N | P | N | S | 0 | 00. | 18 (9) |
| M07T1P7PPBS000. | M | 07 | T | 1 | P | 7 | P | P | B | S | 0 | 00. | 21 (9.5) |
| M07T1P8PPBS000. | M | 07 | T | 1 | P | 8 | P | P | B | S | 0 | 00. | 21 (9.5) |
| M07T1P7PPNS000. | M | 07 | B | 1 | P | 7 | P | P | N | S | 0 | 00. | 17 (8) |
| M07T1P8PPNS000. | M | 07 | B | 1 | P | 8 | P | P | N | S | 0 | 00. | 17 (8) |
| M07B1P1PPBS000. | M | 07 | B | 1 | P | 1 | P | P | B | S | 0 | 00. | 17 (8) |
| M07B1P2PPBS000. | M | 07 | B | 1 | P | 2 | P | P | B | S | 0 | 00. | 17 (8) |
| M07B1K1KPBS000. | M | 07 | B | 1 | K | 1 | K | P | B | S | 0 | 00. | 21 (9.5) |
| M07B1K2KPNS000. | M | 07 | B | 1 | K | 2 | K | P | B | S | 0 | 00. | 21 (9.5) |
| M07B1N1NPBS000. | M | 07 | B | 1 | N | 1 | N | P | B | S | 0 | 00. | 18 (9) |
| M07B1N2NPBS000. | M | 07 | B | 1 | N | 2 | N | P | B | S | 0 | 00. | 18 (9) |

Pump Brand
M= MARATHON II®

Pump Size
07= 3/4"

Check Valve Type
B= Ball
T=Trihedral

Design Level
1= Design Level

Wetted Material
K= PVDF
N= Nylon
P= Polypropylene

Diaphragm/Check Valve Materials
1= Santoprene/Santoprene
2= Virgin PTFE-Santoprene Backup/Virgin PTFE
7= Santoprene/Buna
8= Virgin PTFE-Santoprene Backup.Viton

Check Valve Seat
K= PVDF
N= Nylon
P= Polypropylene

Non-Wetted Material Options
P= Polypropylene
I= Polypropylene with PTFE Hardware

Porting Options
A= ANSI Flange
N= NPT Threads
1= Dual Porting (NPT)
2= Top Dual Porting (NPT)
3= Bottom Dual Porting (NPT)
4= Dual Porting (BSP)
5= Top Dual Porting (BSP)
6= Bottom Dual Porting (BSP)
B= BSP Threads

Pump Style
S= Standard

Pump Options
0= None
2= Mesh Muffler

Kit Options
00.= None
P0.= 10-30VDC Pulse Output Kit
P1.= Intrinsically-Safe 10-30VDC Pulse Output Kit
P2.= 110/120 or 220/240VAC Pulse Output Kit
P3.= Intrinsically-Safe 110/120VAC Pulse Output Kit
P4.= Intrinsically-Safe 220/240VAC Pulse Output Kit
E0.= Solenoid Kit with 24VDC Coil
E1.= Solenoid Kit 24VDC Explosion-Proof Coil
E2.= Solenoid Kit with 24VAC/12VDC Coil
E3.= Solenoid Kit with 24VAC/12VDC Explosion-Proof Coil
E4.= Solenoid Kit with 110VAC Coil
E5.= Solenoid Kit with 110VAC Explosion-Proof Coil
E6.= Solenoid Kit with 220VAC Coil
E7.= Solenoid Kit with 220VAC Explosion-Proof Coil
SP= Stroke Indicator Pins

**CAUTION! Operating temperature limitations are as follows:**

| Materials | Operating Temperatures | | |
|---|-------------------------------|-----------------|---------------------------------|
| | Maximum* | Minimum* | Optimum** |
| Santoprene® Injection molded thermoplastic elastomer with no fabric layer. Long mechanical flex life. Excellent abrasion resistance. | 212°F 100°C | -10°F -23°C | 50°F to 212°F 10°C to 100°C |
| Virgin PTFE Chemically inert, virtually impervious. Very few chemicals are known to react chemically with PTFE: molten alkali metals, turbulent liquid or gaseous fluorine and a few fluoro-chemicals such as chlorine trifluoride or oxygen difluoride which readily liberate free fluorine at elevated temperatures. | 212°F 100°C | -35°F -37°C | 50°F to 212°F 10°C to 100°C |
| PVDF | 200°F -93°C | -10°F -13°C | |
| Polypropylene | 150°F 65°C | -40°F 5°C | |
| Polyutethane | 210°F 99°C | -40°F -40°C | -40°F to 210°F -40°C to 99°C |
| Nylon | 120°F 48°C | 32°F 0°C | |

For specific applications, always consult "Chemical Resistance Chart" Technical Bulletin


*Definite reduction in service life.

**Minimal reduction in service life at ends of range.

Dimensions: M07 Non-Metallic

Dimensions in Inches

Dimensional Tolerance: $\pm 1/8"$

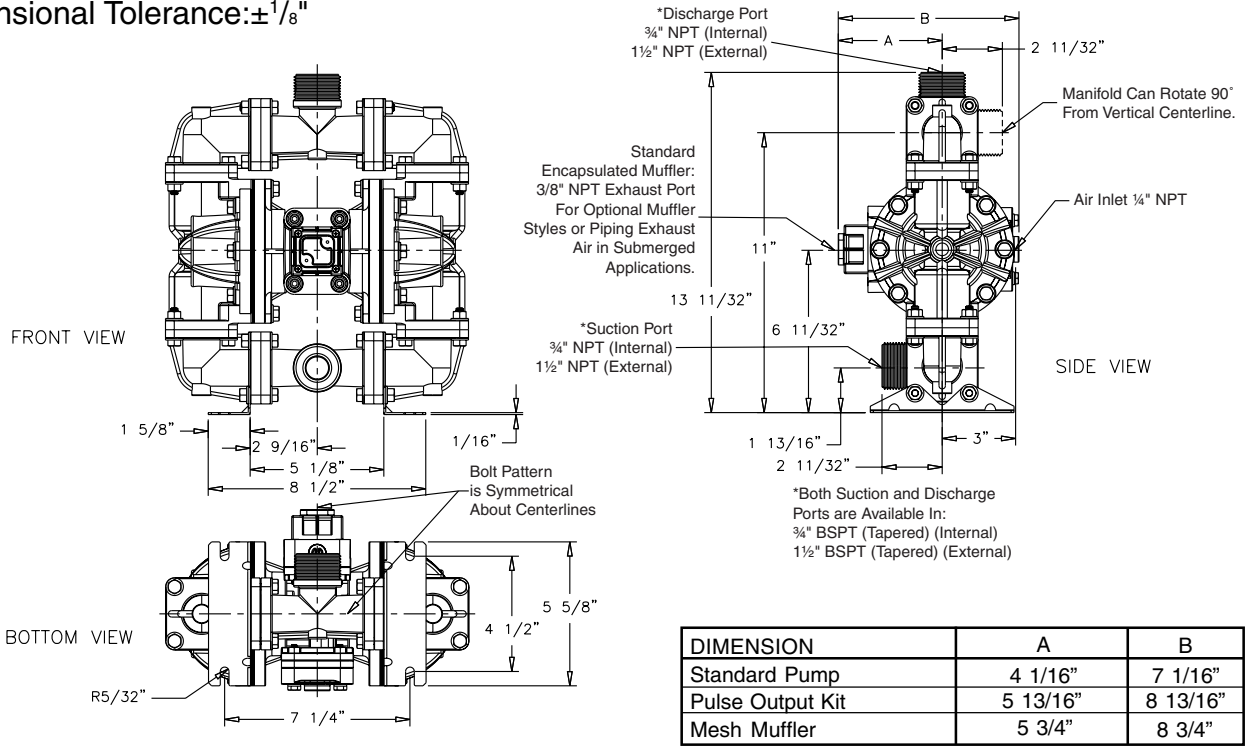

Dimensions in Millimeters

Dimensional Tolerance: $\pm 3\text{mm}$

